

HEART ATTACK RECOGNITION AND HEART RATE MONITORING SYSTEM USING IOT

S.GOPI , Dr.E.PUNARSELVAM

Abstract— The proposed law user's sensors as permit in accordance with discover mettle degree regarding a person using heartbeat sensing also condition the man or woman is at home. The sensor is after interfaced to a microcontroller that permits checking morale degree readings then transmitting to them over internet. In this paper, proposing a far off sensing parameter regarding the ethnical body as consists concerning bough then temperature. The parameters to that amount are old for sensing or monitoring intention sends the facts thru wireless sensors. Adding a net based totally looking at helps in accordance with maintain tune over the normal fitness fame about a patient.

Keywords: Internet of Things, RFID, GPS, PIC, WSN, LED.

I. INTRODUCTION

The term IoT is semantically related to two words "Internet" and "Things," where Internet is known as the global system that use TCP/IP protocol suite to interconnect different computer networks, while Things refer to any objects that surround us and have the capability to sense and collect data about its environment. Therefore, IoT can be defined as a global system based on IP suite, in which objects equipped with sensors, Radio Frequency Identification (RFID) tags or barcodes have a unique identity, operate in a smart environment and are seamlessly integrated into the information network by using intelligent interfaces. IoT relies on a wide range of materials, network infrastructure, communication protocols, Internet services, and computing technologies. Among the range of different technologies involve in the IoT

concept, WSN is one of the most important technologies that enable the integration of sensing devices into IoT ecosystems.

Sensing devices are deployed in network to seamlessly collect and send in real-time raw data through the Internet to reach a data center. End users can remotely control the devices using Internet services. They can also access the data center via Internet anytime from anyplace in order to retrieve, process, and analyze data. IoT architecture is an open architecture based on multi-layers. Services-oriented architecture is one of the approaches that have been adopted by researchers in recent years to implement IoT system.

II. ARCHITECTURE DESIGN OF INTERNET OF THINGS

The concept of integration of system is illustrated this is the concept of the project that shows the position of all the component which will be discussed in next section. If the ultrasonic sensor detects the output below 1 meter from the user, buzzer and LED will trigger and Vibrator Motor will decode the sound only if the obstacles detected exactly at 1 meter. The same process happens for distance 1.5 meters and 2 meters. The figure 1.1 shows Architectural Design of IOT and The figure 1.2 shows SHM framework overview based on IoT

Mr.S.Gopi , Assistant Professor , Department of Information Technology, Muthayammal Engineering College , Rasipuram, Tamil Nadu (Email: gopi.s.it @mec.edu.in)

Dr.E.Punarselvam , Associate Professor , Head of Information Technology , Muthayammal Engineering College , Rasipuram, Tamil Nadu (Email :punarselvam83@gmail.com)

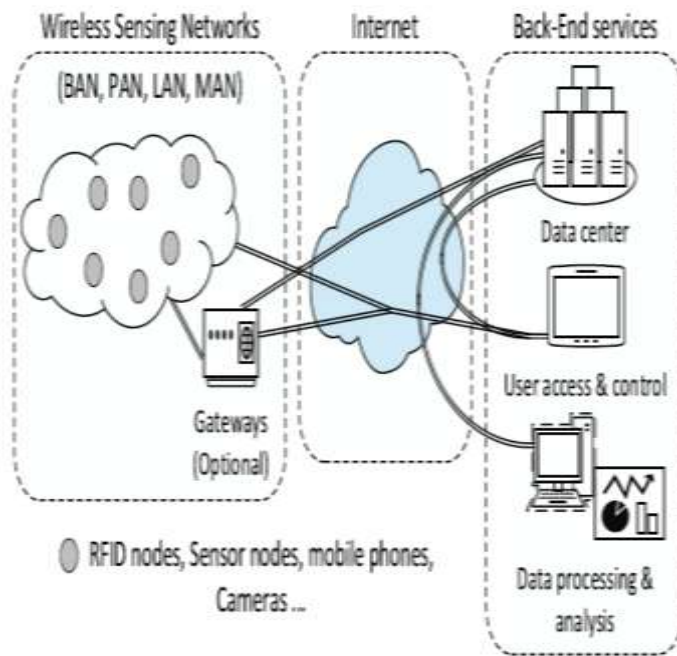


Figure 1. Architectural Design of IOT

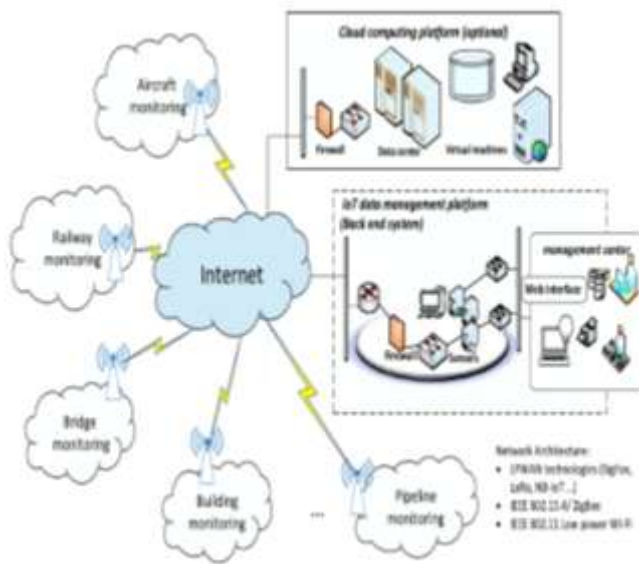


Figure 2. SHM framework overview based on IoT

III. PROPOSED WORKFLOW METHOD

In the proposed system, an efficient surveillance system is designed, that can monitor the patient on time and without the presence of the nurse in any place by using IOT technologies. In-house human behavior detection and Classification are involving in this system, even the patients can be monitored in any scenarios without any restrictions. Because of its compatibility and cost anyone can use this device so easily and its operation is too user-friendly. This

system provides Global Communication with small size of devices with less power consumption.

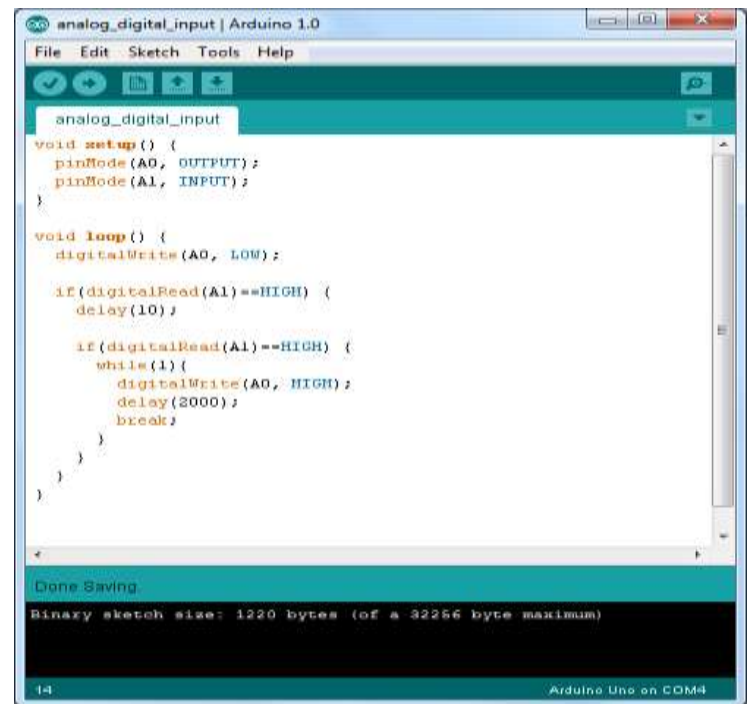


Figure 3. Arduino IDE Environment

Dataflow Diagram

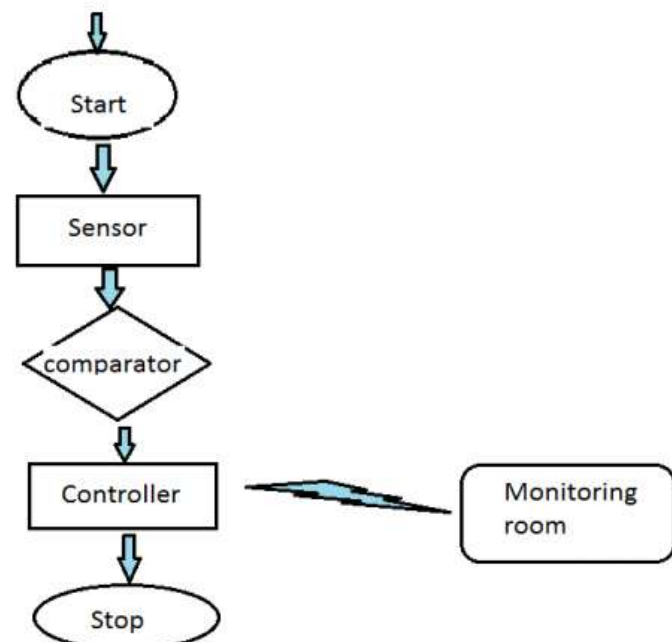


Figure 4. Workflow sequence

pins as shown to power the Pi or BBB and establish the RX/TX link.

- If you are running Windows 7/8/10 etc, check this tutorial page with links to drivers for both PL2303 and CP2102
- If you are running Mac OS X, check this tutorial page with links to drivers for both PL2303 and CP2102
- If you are running Linux, drivers are already included in the kernel, no need to install anything!

Also handy for hacking WiFi routers to install alternate OS's, or nearly any other 3.3V logic serial port. This is easier to use than an FTDI cable in many cases because the wires are separated. Note that we call this a "TTL cable" (since that's what they're called) but technically it's CMOS logic.



Figure 6. Heartbeat Sensor Module

6) Heartbeat Module

Heart rate data can be really useful whether you are designing an exercise routine, studying your activity or anxiety levels or just want your shirt to blink with your heart beat. The problem is that heart rate can be difficult to measure. Luckily, the Pulse Sensor Amped can solve that problem.

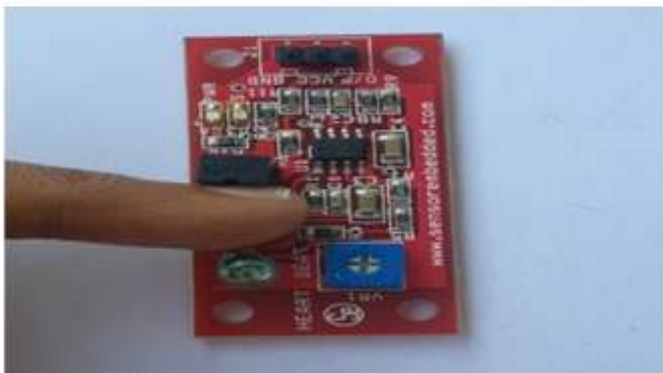


Figure 7.Heartbeat Sensor Module

The Pulse Sensor Amped is a plug-and-play heart-rate sensor for microcontrollers. It can be used by students, artists, athletes, makers, and game and mobile developers who want to easily incorporate live heart-rate data into their projects. It essentially combines a simple optical heart rate sensor with amplification and noise cancellation circuitry making it fast and easy to get reliable pulse readings. Also, it sips power with just 4mA current draw at 5V so it's great for mobile applications. Simply clip the Pulse Sensor to your earlobe or finger tip and plug it into your 3 or 5 Volt Arduino and you're ready to read heart rate! The 24" cable on the Pulse Sensor is terminated with standard male headers so there's no soldering required. Of course Arduino example code is available as well as a Processing sketch for visualizing heart rate data.

V. RESULT AND DISCUSSION

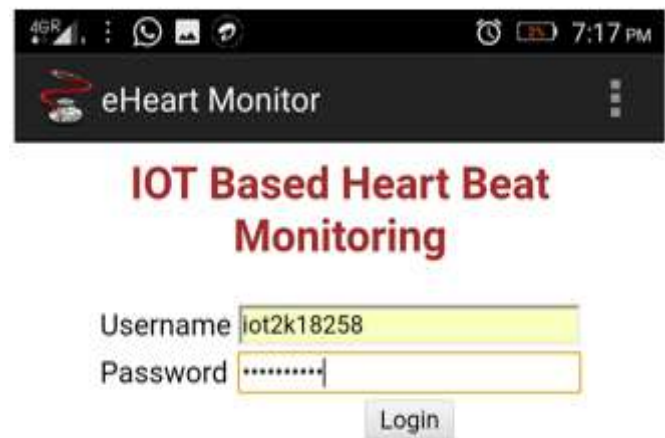


Figure 8. User name and password verification for IOT based heart beat monitoring system

A. HOME PAGE



Figure 9.Heartbeat Sensor

B. MOBILE NUMBER



Figure 10.Report displayed on Mobile Number

C. HEART BEAT NORMAL STAGE




Figure 11.Report for Heartbeat Sensor

D. ABNORMAL STAGE



Figure 12.Report for abnormal stage

E. MESSAGE NOTIFICATION

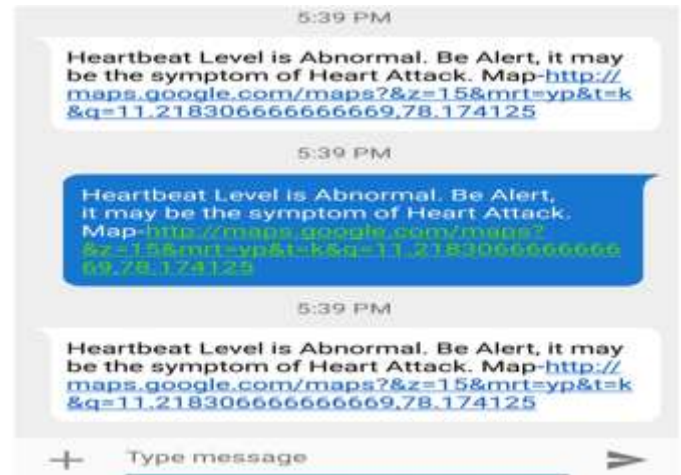

VI.CONCLUSION AND FUTURE ENHANCEMENTS

1) CONCLUSION

In order to provide a framework for IOT Based Heartbeat Monitoring and Alert System implementation, this is intended to give a survey of current technologies on IoT paradigm. It can be seen that the choice of wireless technologies, which address Structural Health Monitoring system deployment based on IoT, is extremely large. As IoT is a technology that is in trend, a myriad of technologies is being developed to meet all the requirements from IoT community. A number of solutions for IoT communications of Structural Health Monitoring have been proposed in recent years to connect net device, which is able to sense and collect useful information.

2) FUTURE ENHANCEMENTS

After checking all the pin connections and adding the library to the Arduino IDE and uploading the source code, run the code. LCD display will be turned on to display the Human-Heart rate reading obtained by the Pulse Sensor. Place your index finger on the front side of the pulse sensor, you should see LED1 (red) glow in time with your Human-Heartbeat when you place your finger on the sensor

References

- [1] Dr.E.Punarselvam and S.Gopi,“Effective and Efficient Traffic Scrutiny in Sweet Server with Data Privacy”, International Journal on Applications in Information and

-
- Communication Engineering Volume 5 : Issue 2:
November 2019, pp 1 – 5.
- [2] P. Suresh, J. V. Daniel, V. Parthasarathy, and R. H. Aswathy, "A state of the art review on the Internet of Things (IoT) history, technology and fields of deployment," in Proc. IEEE Int. Conf. Sci. Eng. Manag. (ICSEMR), Chennai, India, 2014, pp. 1–8.
 - [3] O. Vermesan and P. Friess, Internet of Things—From Research and Innovation to Market Deployment. Aalborg, Denmark: River, 2014.
 - [4] L. D. Xu, W. He, and S. Li, "Internet of Things in industries: A survey," IEEE Trans. Ind. Informat., vol. 10, no. 4, pp. 2233–2243, Nov. 2014.
 - [5] J. Yick, B. Mukherjee, and D. Ghosal, "Wireless sensor network survey," J. Comput. Netw., vol. 52, no. 12, pp. 2292–2330, 2008.
 - [6] Abawajy J H, Hassan M M. Federated Internet of Things and Cloud Computing Pervasive Patient Health Monitoring System[J]. IEEE Communications Magazine, 2017, 55(1):48-53.
 - [7] Hemant G, Subhas M, Xiang G, et al. WSN- and IoT-Based Smart Homes and Their Extension to Smart Buildings[J]. Sensors, 2015, 15(5):10350.
 - [8] Qi J, Yang P, Hanneghan M, et al. Ellipse fitting model for improving the effectiveness of life-logging physical activity measures in an Internet of Things environment[J]. Iet Networks, 2016, 5(5):107-113.
 - [9] Qi J, Yang P, Min G, et al. Advanced internet of things for personalised healthcare system: A survey[J]. Pervasive & Mobile Computing, 2017, 41.
 - [10] Yuenyong S, Nishihara A, Kongprawechnon W, et al. A framework for automatic heart sound analysis without segmentation[J]. Biomedical Engineering Online, 2011, 10(1):13.
 - [11] Dao A T. Wireless laptop-based phonocardiograph and diagnosis[J]. 2015, 3(3):e1178.
 - [12] Pérez-Guzmán R E, García-Bermúdez R, Rojas-Ruiz F, et al. Evaluation of Algorithms for Automatic Classification of Heart Sound Signals[C]// International Conference on Bioinformatics and Biomedical Engineering. Springer, Cham, 2017:536-545.
 - [13] Leng S, Tan R S, Chai K T, et al. The electronic stethoscope[J]. Biomedical Engineering Online, 2015, 14:66.
 - [14] Tosi D, Olivero M, Perrone G. Low-cost fibre Bragg grating vibroacoustic sensor for voice and heartbeat detection[J]. Applied Optics, 2008, 47(28):5123.
 - [15] Hu Y, Xu Y. An ultra-sensitive wearable accelerometer for continuous heart and lung sound monitoring[C]// Engineering in Medicine & Biology Society. ConfProc IEEE Eng Med BiolSoc, 2012:694.